


适用范围：

技术特点：

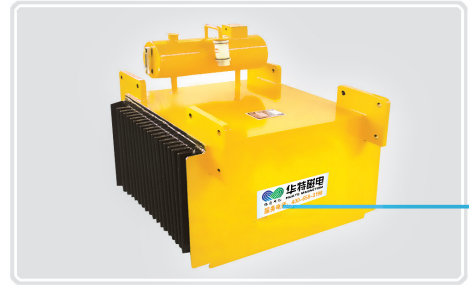

参数 型号	项目	适应带宽 mm	额定吊高 h mm	磁场强度 ≥ mT	适应带速 ≤ m/s	物料厚度 ≤ mm	励磁功率 ≤ kw	重量 kg	外形尺寸 mm				
									A	B	C	D	E
RCDE-6		600	175	60	4.5	125	1.5	650	830	835	940	770	610
RCDE-6.5		650	200	70		150	2.0	750	880	890	1000	820	670
RCDE-8		800	250	70		200	3	1150	1190	1090	1050	1000	840
RCDE-10		1000	300	70		250	4.5	1400	1410	1330	1650	1238	985
RCDE-12		1200	350	70		300	6	2780	1550	1450	1260	1400	1180
RCDE-14		1400	400	70		350	8.5	4200	1750	1700	1350	1600	1460
RCDE-16		1600	450	70		400	12.5	5700	1950	1850	1500	1700	1640
RCDE-18		1800	500	70		450	18	7300	2170	2050	1500	1900	1850

型号	项目 参数	适用带宽 mm	额定吊高 h mm	磁场强度 ≈ mT	励磁功率 ≤ KW	外形尺寸 mm			适用带速 ≤ m/s	整机重量 kg
						A	B	C		
RCDE-6.5	T1	650	200	90	3.0	1050	990	940	5.8	950
	T2			120	5.0	1090	1030	970		1200
	T3			150	8.0	1090	1030	1000		1470
RCDE-8	T1	800	250	90	5.0	1180	1120	1050		1570
	T2			120	9.0	1410	1330	1080		2000
	T3			150	13.0	1410	1330	1230		2470
RCDE-10	T1	1000	300	90	7.5	1410	1330	1250		2430
	T2			120	12.5	1550	1450	1250		3090
	T3			150	16.5	1550	1450	1350		3850
RCDE-12	T1	1200	350	90	10.0	1600	1480	1250		3500
	T2			120	14.0	1750	1700	1350		4550
	T3			150	21.0	1750	1700	1420		5640
RCDE-14	T1	1400	400	90	14.0	1780	1720	1350		4950
	T2			120	18.0	1950	1850	1420		6990
	T3			150	26.0	1950	1850	1480		7940
RCDE-16	T1	1600	450	90	15.0	1980	1860	1350		6770
	T2			120	22.0	1980	1860	1430		8720
	T3			150	32.0	2170	2050	1350		10820
RCDE-18	T1	1800	500	90	19.0	2170	2050	1420	9000	
	T2			120	28.0	2170	2050	1540	11790	
	T3			150	38.0	2350	2300	1420	14800	

